

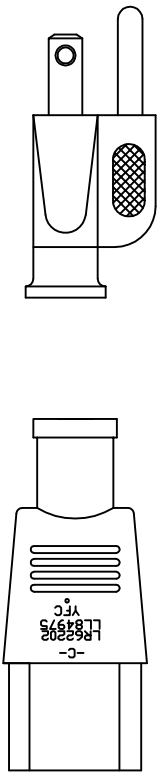


ROHS COMPLIANT

PLUG MARKING:

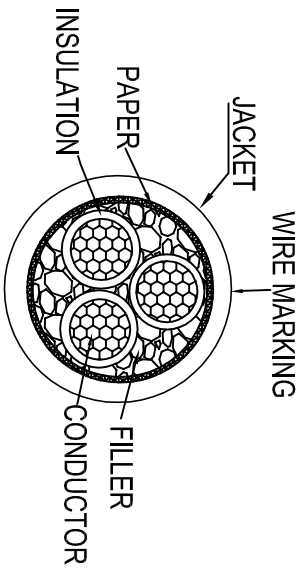

GREEN

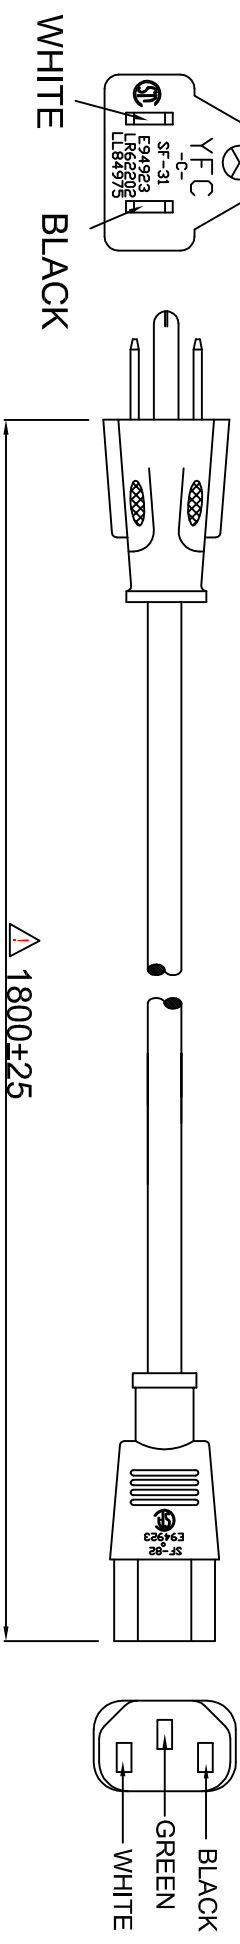

WIRE MARKING (Hollow)		(UL) E135710-F3 SVT 3X18AWG 105°C 300V VW-1 CSA LL95737 SVT 3X0.824mm2(18AWG) 105°C 300V FT2 YFC-BONEAGLE	
Conductor 導體	Insulation 絕緣體	Jacket 被覆體	Overall diameter 完成外徑
AWG 18#	Resistance maximum 最大電阻(≤)	Min.Thick 最小厚度	Min.Thick 最小厚度
	at20°C,22.4ohms/km (41/0.154) at25°C,22.8ohms/km	Diameter 絕緣外徑	AVG.Thick 平均厚度
		Length of Lay 芯絞	
		Min.Thick 最小厚度	
		Min.Thick 最小厚度	
		AVG.Thick 平均厚度	
		Overall diameter 完成外徑	

(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE. THE RESISTANCE OF CONDUCTOR IS STANDARD THEM)

- ELECTRIC TESTING:
1. 100% OPEN & SHORT TESTING.
 2. VOLTAGE RATING:AC ≥1500V/S.
 3. PLUG(SF-31) RATED POWER:125V 10A UL-E94923 CSA-LR62202
 4. PLUG(SF-82) RATED POWER:125V 10A UL-E94923 CSA-LR62202
 5. WIRE:SVT 18/3 RATED VOLTAGE:300V 10A UL-E135710 CSA-LL95737
 6. COLOR:BLACK

A/V/O	DATE	REV	DESCRIPTION	BY	CHECK
		A/0			

2D Direct GmbH

PAGE	1/1	DESCRIPTION SVT 18/3 SF-31+SF-82			
重點尺寸		Unless specified on the drawing, tolerances are per the follows:			
X ±1		CUSTOMER NAME	Direct	SAMPLE NO.	DATE
.XX ±0.1		CUSTOMER PART NO.	CP099	DRAW	DATE 2012/02/07
3RD		SCALE		CHECK	DATE 2012/02/07
		UNIT	MM	APPROVAL	DATE
		PATH NAME	//D/業務		