



CAT 6A Inline Coupler

Part no.: NP0025U

Technical Features


Cat 6A Class EA 10G 500MHz

Cat.6A to ISO/IEC 11801 and TIA/EIA-568-C.2

2 x RJ45 female, unshielded

Color: white

Technical Drawings



ELECTRICAL

1. Contact Resistance: 20MΩ MAX
2. Insulation Resistance: 500MΩ MIN@500V DC
3. Withstand Voltage: DC 1000V AC 700V RMS 60Hz, 1MIN
4. Component testing for Cat.6A to ISO/IEC 11801 Ed.2.2:2011-06
DIN EN 50173-1:2011-09 TIA/EIA-568-C.2 (2009-08)

ENVIRONMENTAL

1. Storage: -40° to +70°
2. Operation: -10° to +60°

MECHANICAL

1. RJ45 Contact Life: 750 Times Min
2. Plug Inforce<30N

NP0025U



4 052792 045031

Made in China


www.logilink.com



RoHS
compliant



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered trademark of their respective owners.

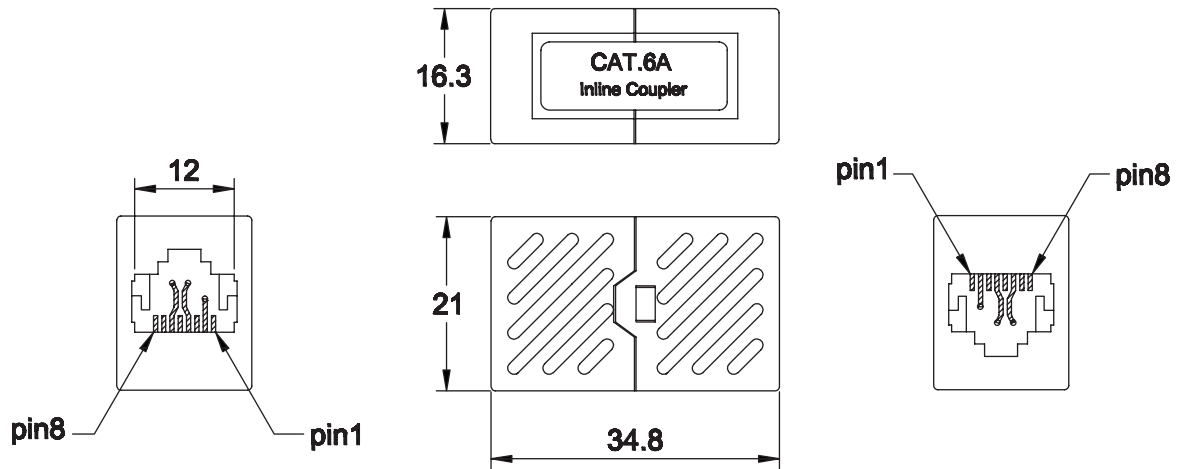


Unit: mm

Package Contents

CAT 6A Inline Coupler x 1

Packaging Informations

Packing Dimension	60 x 80mm
Packing Weight	8g
Carton Dimension	420 x 263 x 450mm
Carton Q'ty	1000pcs
Carton Weight	11 kg

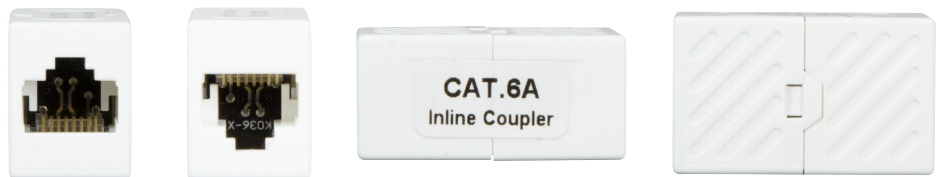

NP0025U



4 052792 045031

Made in China

www.logilink.com



RoHS
compliant



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered trademark of their respective owners.